

General Specifications

Personal Conductivity Meter Model SC72

Compact, Easy-to-Use, and Waterproof, the SC72 is designed specifically to meet the needs of both the field and the laboratory. This portable conductivity meter includes advanced features such as Data Memory, Alarm, and Self-Diagnostic functions. Combined with a wide variety of electrodes, the SC72 offers the flexibility to meet the requirements of nearly any conductivity application.

FEATURES

- Waterproof (IP67), sealed case and connector cover to keep out moisture
- Autoranging allows 0 to 2000 mS/cm capability
- Large, easy-to-read display
- Automatic Temperature Compensation (NaCl curve or User-defined coefficient)
- Self-Diagnostics warn of fault conditions
- Auto power off extends battery life
- 300 Points of Data Memory (stores conductivity value, temperature, date, and time)
- Audio Alarm Function

SPECIFICATIONS

Measuring Ranges

Conductivity: 0 to 2000 mS/cm (dependent on sensor selected)
Resistivity: 0-40.0 M Ω (high purity sensor only)
Temperature: 0 to 80°C

Display: Digital LCD

Resolution

Conductivity: 0.001 μ S/cm (for 0 to 2 μ S/cm range)
Resistivity: 0.1 M Ω
Temperature: 0.1°C

Repeatability: \pm 1% Range Full Scale

Process Temperature: 0 to 80°C

Ambient Temperature: 0 to 50°C

Power Supply: Two AA size Alkaline Batteries






HOW TO ORDER THE SC72

Model Code	Description
SC72-00-E-AA	Hand-Held Conductivity Meter Without Sensor

HOW TO ORDER SEPARATE CONDUCTIVITY SENSORS

Part Number	Description
SC72SN-21-AA	General Purpose Sensor with 0.75m cable; Integral Temperature Sensor; 0-200mS/cm range
SC72SN-23-AA	General Purpose Sensor with 3.0m cable; Integral Temperature Sensor; 0-200mS/cm range
SC72SN-11-AA	Pure Water Sensor with 0.75m cable; Integral Temperature Sensor; 0-200 μ S/cm range
SC72SN-31-AA	Chemical Resistant Sensor with 0.75m cable; Integral Temperature Sensor; 0-200mS/cm range
SC72SN-41-AA	High Conductivity Sensor with 0.75m cable; Integral Temperature Sensor; 0-2000mS/cm range

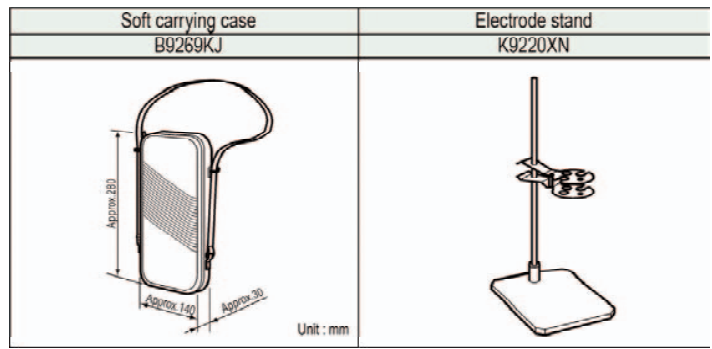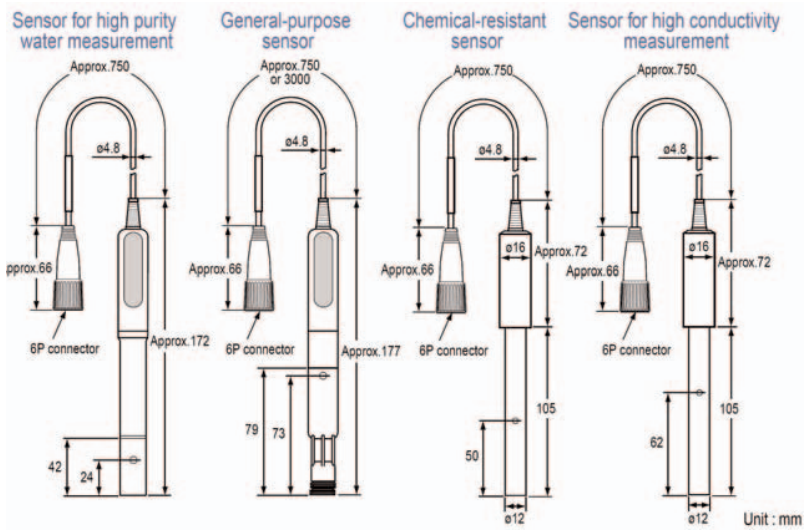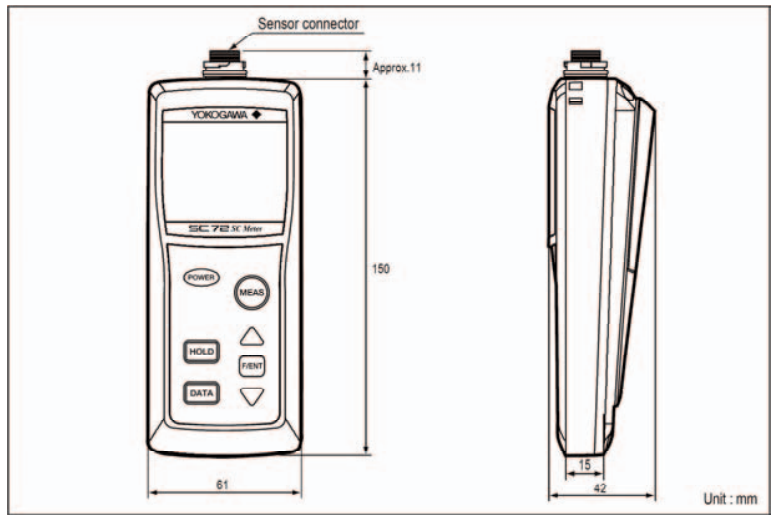

YOKOGAWA ◆

YOKOGAWA ELECTRIC CORPORATION
World Headquarters
 9-32, Nakacho 2-chome, Musashino-shi,
 Tokyo 180-8750, JAPAN
 Tel.: +81-422-52-5617 Fax: +81-422-52-3421
World Sales Headquarters
 9-32, Nakacho 2-chome, Musashino-shi,
 Tokyo 180-8750, JAPAN
 Tel.: +81-422-52-6339 Fax: +81-422-52-6552
YOKOGAWA ELECTRIC ASIA PTE. LTD.
 11 Tampines Street 92, SINGAPORE 528872
 Tel.: +65-783-9537 Fax: +65-786-2606

YOKOGAWA EUROPE B.V.
 P.O. Box 163,3800 AD Amersfoort,
 Vanadiumweg 11, 3812 PX Amersfoort,
 THE NETHERLANDS
 Tel.: +31-33-4-641611 Fax: +31-33-4-641610
YOKOGAWA CORPORATION OF AMERICA
 2 Dart Road
 Newnan, GA 30265-1040, U.S.A.
 Tel.: +1-770-254-0400 Fax: +1-770-254-0928
YOKOGAWA AMERICA DO SUL S.A.
 Avenida Jurua, 149 Alphaville CEP 06455-010 Barueri
 Sao Paulo BRAZIL
 Tel.: +55-11-7295-6282 Fax: +55-11-421-3538

Represented by: